


ECT Sample CUTTERS “CN” series

The pneumatic cutters prepares accurate samples of corrugated board for ECT testing. The twin cut blades and the sampling-positioning device produce a clean and parallel cut sample.

According to standard: TAPPI - DIN – EN – ISO 3037

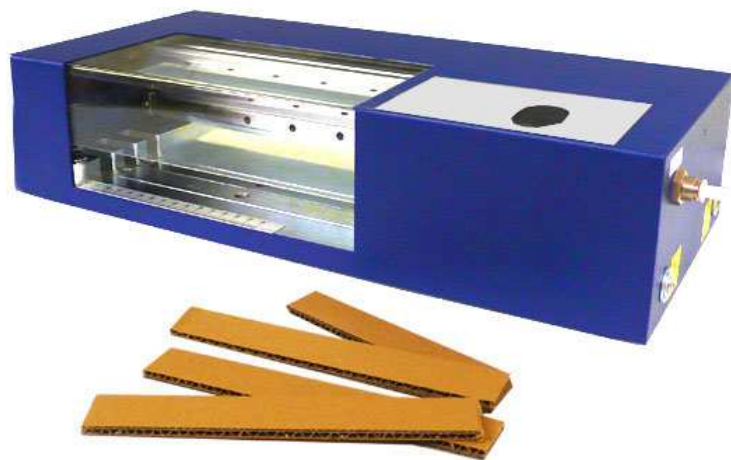

- ☐ Easy to use
- ☐ Safe operation
- ☐ Rugged design

Sample thickness up to 15 mm
CE
Fixed width of cut (select one when ordering)

To prepare corrugated board samples for the E.C.T. (Edge Crush Test).

The cut of the sample is made by 2 parallel blades, creating rectangular samples of the select width and up to a maximum of 15mm thickness.

The equipment is provided with an acrylic screen in order to protect the user during operation, to help prevent accidents during use.

Models available:

- Cod. T-6873 - **CN-25** model of $25 \pm 0,5$ mm wide - FEFCO
- Cod. T-6923 - **CN-50,8** model of $50,8 \pm 1,6$ mm (2.00" $\pm 0,063$ in.) - Onda A - TAPPI
- Cod. T-6924 - **CN-31,8** model of $31,8 \pm 1,6$ mm (1.25" $\pm 0,063$ in.) - Onda B - TAPPI
- Cod. T-6925 - **CN-31,8** model of $38,1 \pm 1,6$ mm (1.50" $\pm 0,063$ in.) - Onda C - TAPPI

NOTE: Other cutting widths can be supplied with order

CONNECTIONS:

Compressed air: 6-8 Bar / 6-8 Kg / cm²

DIMENSIONS AND WEIGHT:

Dimensions: 630 x 330 x 250 mm (W x D x H)

Box for transport: 750 x 540 x 450 mm (W x D x H)

Weight Net/Gross: 15 Kg / 46 Kg

DELIVERY CONTENT:

> Pneumatic ECT Samples Cutter model...

